

## Reservoirs

## 3-Chamber Plastic



## Features

- Fiberglass reinforced nylon material.
- Three separate internal reservoirs allow for complete evacuation of one without affecting the remaining two.
- Gasket-sealed removable lid allows for easy cleaning.
- Reservoir lid features safety screens to prevent foreign objects (nuts, bolts) from falling into reservoir.
- Leak-proof baffle design ensures that fluid remains in reservoir.
- Convenient fluid level indicator windows on the reservoir body.
- 2-hole mount provides simple installation onto firewall/bulkhead.
- Two model available; Push-on type for use with rubber hose and clamps, or AN-4 type for use with AN-4 braided lines.

Tilton's popular 3-Chamber Aluminum Reservoir is now available in a newly designed plastic version. These new reservoirs incorporate many features found in the billet aluminum version at a price that meets most budgets.

There is no longer a reason to use three separate reservoirs — this reservoir combines the three into one convenient package.

Rear Brake Chamber	Front Brake Chamber	Clutch Chamber
<b>6.3 oz</b> (186 ml)	<b>9.8 oz</b> (289 ml)	<b>4.0 oz</b> (118 ml)




Description	Part Numbers
Reservoir - Push-on type	72-576
Reservoir - AN-4 Fitting type	72-577

Service Parts	Part Numbers
Replacement cap	72-576-6
Cap baffle, funnel-type	72-576-4
Lid gasket	72-576-3
Fitting, AN-4	72-577-2

Hose Kit available for use with Tilton reservoirs.

96" length with 6 clamps.

(P/N 74-221)

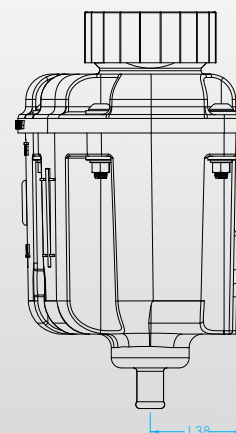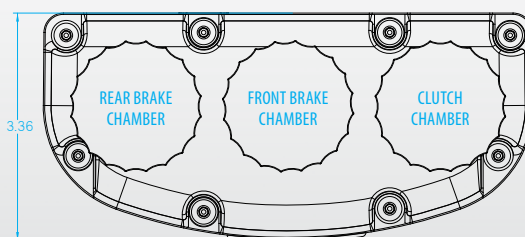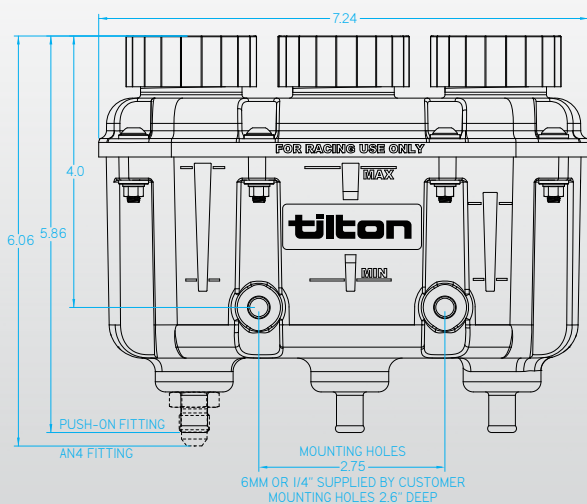

**- WARNING -**  
PTFE, EPDM or SBR hose must be used.